

QH-1132N

All-oriented bracket Waterproof IR Camera




Key Features

- 1/3" Sony CCD with 600TVL
- 24EA IR LED with 30M IR Distance
- Built-in 3.6mm DaiWon lens/6mm lens with 0Lux when LED on
- Auto Day&Night, BLC and White Balance
- IP65-rated waterproof standard, Voltage with DC12V
- OEM color with Grey and Beige

Dimensions

Unit : mm

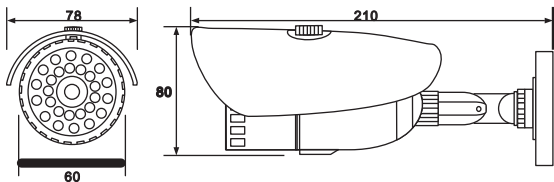

Technical Specifications

Model NO.	QH-1132NSNH-3CP9	QH-1132NS
VIDEO		
Imaging Device	1/3" Sony Color CCD	1/4" Sony Color CCD
TV System	PAL/NTSC	
Total Pixels	PAL:752(H)*582(V) NTSC:768(H)*494(V)	PAL:537(H)*597(V) NTSC:537(H)*505(V)
Effective Pixels	PAL:500(H)*582(V) NTSC:510(H)*492(V)	PAL:500(H)*582(V) NTSC:510(H)*492(V)
Scanning System	2:1 Interlace	
Synchronization	Internal	
Horizontal Resolution	600TVL	420TVL
Min. Illumination	0Lux(IR ON)	
S/N Ratio	>48dB	
Video Output	1Vp-p, 75ohm, BNC	
LENS		
Focal Length	3.6mm DaiWon lens/6mm lens	
Regular Field of View	D: 94° 26'/H: 79° 37'/V: 69° 8'	
Min.Object Distance	0.4m	
OPERATIONAL		
Day & Night	Auto	
Backlight Compensation	Auto	
White Balance	Auto	
Electronic Shutter Speed	PAL:1/50~1/100,000sec; NTSC:1/60~1/100,000sec	
Infrared LED	24EA	
IR Distance	30 Meters	
Infrared Spectrum	850nm	
ENVIRONMENTAL		
Operation Temperature	-10°C~50°C	
Storage Temperature	-20°C~60°C	
Protection	Outdoor IP65 (Waterproof)	
ELECTRICAL		
Input Voltage/Current	DC12V330mA	
Adapter Requirement	DC12V1A	
MECHANICAL		
Color	Grey/Beige	
Bracket	All-Oriented Bracket	
Dimensions	Φ80*210mm	
Net Weight	0.45kg	0.60kg