

QH-VD229

LED Array Vandal-proof Dome Camera




Key Features

- 1/3" Sony CCD700/600TVL
- 3.6/6 mm Fixed Lens Optional
- LED Array with 1EA LED and 10M IR Distance
- OSD operation function
- Vandal-proof Casing
- DNR, Motion Detection, Mirror and Privacy Mask Function

Dimensions

Unit : mm

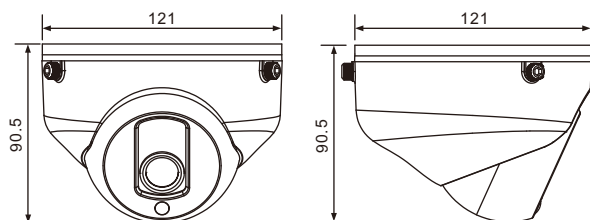

Technical Specifications

Model NO.	QH-VD229SNH-4OSD	QH-WDR229SNH-3
VIDEO		
Imaging Device	1/3" Sony Effio-E 960H Exview CCD	1/3" Sony DS Color CCD
TV System	PAL/NTSC	
Total Pixels	PAL:1020(H)*596(V);NTSC:1020(H)*508(V)	PAL:795(H)*596(V);NTSC:811(H)*508(V)
Effective Pixels	PAL:976(H)*582(V);NTSC:976(H)*494(V)	PAL:752(H)*582(V);NTSC:768(H)*494(V)
Scanning System	2:1 Interlace	
Synchronization	Internal	
Horizontal Resolution	700TVL	600TVL
Min. Illumination	0Lux/F1.2(LED ON)	
S/N Ratio	≥48dB	
Video Output	1Vp-p,75ohm, BNC	
LENS		
Focal Length(Zoom Ratio)	3.6/6 mm Fixed Lens Optional	
OPERATIONAL		
On Screen Display	Support	
Shutter	Auto	
AGC	Auto	
Wide Dynamic Range	N/A	52db(*128)
Backlight Compensation	ON/OFF	WDR/BLC/OFF
DNR	2D-DNR	3D-DNR
Motion Detection	Yes	On/Off(8 Zones)
ATR/H.L.C./AFD	Yes	N/A
White Balance	ATW	ATW/AWC/Manual/Outdoor
Privacy Mask	8 Masks	On/Off(8 Masks)
Blemish Compensation	N/A	256 Point(Even 126, ODD 126)
Digital Zoom	N/A	ON(*6)/OFF
Sense-up	N/A	Auto/Fixed/Off
Stabilizer	N/A	ON/OFF
Delay CNT	0-10	N/A
Mirror	ON/OFF	
Sharpness	1-128	
Infrared LED	1EA LED Array	
IR Distance	10 Meters	
Infrared Spectrum	850nm	
ENVIRONMENTAL		
Operation Temperature	-10°C~50°C	
Storage Temperature	-20°C~60°C	
Protection	Vandal-proof Casing	
ELECTRICAL		
Input Voltage/Current	DC12V400mA	
Adapter Requirement	DC12V1A	
MECHANICAL		
Color	White	
Dimensions	Φ121*90.5mm	
Net Weight	555g	