

QH-D1104B/QH-D1108B

Standalone DVR




Key Features

- 4/8 Channel Standalone DVR
- Linux Operation system, H.264 Compression/AVI
- Record Frame Rate Support D1/HD1/CIF
- Remote Client, IE Browser, Mobile, CMS, Alarm
- RS485, VGA, SATA 2.6*1(1*HDD 2TB)
- 2*USB2.0, USB Disk up to 32G, Removable DVD-RW

Dimensions

Unit : mm

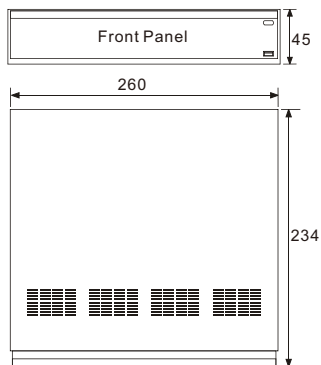

Technical Specifications

Model Name		QH-D1104B	QH-D1108B
OPERATION SYSTEM		LINUX	
VIDEO	VIDEO SYSYEM	NTSC/PAL Switch Selectable	
	INPUT	BNC*4, 1.0Vp-p, 75ohm	BNC*8, 1.0Vp-p, 75ohm
	CVBS	1CH, BNC	
	VGA OUTPUT	STANDARD VGA*1: 1280 x 1024	
AUDIO	INPUT	1CH, RCA	
	OUTPUT	1CH, RCA	
CONTROL	MOUSE	YES	
	IR CONTROLLER	YES	
STORAGE	BUILD IN INTERFACE	SATA 2.6 *1(1*HDD 2TB)	
DISPLAY	DIVISION	1,4	1,4,9
	ZOOM	Preview and Playback Zoom Support	
RECORDING	COMPRESSION	H.264 MAIN PROFILE	
	RECORDING MODE	Manual/Schedule/Motion Detection/Sensor	
	RESOLUTION	NTSC	NTSC:704*480,704*240,352*240
		PAL	PAL:704*576,704*288,352*288
	RECORD FRAME RATE	NTSC	NTSC:120FPS@D1
		PAL	PAL:100FPS@D1
	QUALITY	Worst, Worse, General, Good, Better, Best	
PLAYBACK	MOTION DETECTION	Sensitivity: Multi Level, 8*8Grid	
	PLAYBACK FRAME RATE(PAL)	120(100)FPS	
	MULTI CHANNEL PLAYBACK	1/4	1/4/8
	SPEED	Normal, SLOW&FF(1/4, 1/3, 1/2, 1*, 2*, 3*, 4*)	
	SEARCH METHOD	Time, Even, Channels and Calendar	
COMMUNICATION	REMOTE SOFTWARE	Remote Client, IE Brower, Mobile, CMS	
	REMOTE OPERATION	Remote view, remote playback, remote setup	
	NETWORK SERVICE	TCP/IP, UDP, HTTP, DDNS, SMTP(SSL), LAN, DHCP, PPPOE	
	GUI INTERFACE	Supported GUI 16 Bit True Color	
	PTZ PROTOCOL	1*RS485, Support 18 Kinds of Protocol	
	EXTERNAL	2*USB2.0, Removable DVD-RW, USB Disk up to 32G	
BACKUP	NETWORK	YES	
	FILE	H.264 Compression / AVI	
GENERAL	ALARM IN/OUT	1CH/1CH	
	RS-485	1	
	UNIT DIMENSION(mm)	260(W) x 45(H) x 234(D)	
	OPERATION TEMPTERATURE	10°~40°	
	WORKING HUMIDITY	10% ~ 90%	
	POWER CONSUMPTION	DC 12V, 3A, 10~15W (Exclude HDD)	