

QH-D2104A-A/QH-D2108A-A/QH-D2116A

Standalone DVR




Key Features

- 4/8/16 Channel Standalone DVR
- Linux Operation system, H.264 Compression/AVI
- Record Frame Rate Support D1/HD1/CIF
- Remote Client, IE Browser, Mobile, CMS, Firefox, Google Chrome, Mac Safari
- Talk Back, RS485, VGA, SATA 2.6*2(2*HDD 2TB)
- 2*USB2.0, USB Disk up to 32G, Removable DVD-RW

Dimensions

Unit : mm

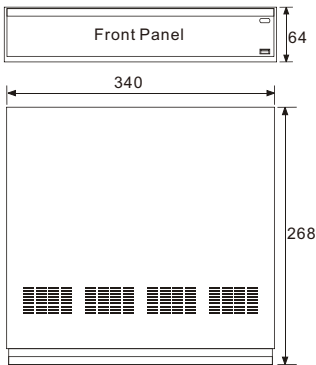

Technical Specifications

Model Name		QH-D2104A-A	QH-D2108A-A	QH-D2116A
OPERATION SYSTEM		LINUX		
VIDEO	VIDEO SYSYEM	NTSC/PAL Switch Selectable		
	INPUT	BNC*4, 1.0Vp-p, 75ohm	BNC*8, 1.0Vp-p, 75ohm	BNC*16, 1.0Vp-p, 75ohm
	CVBS	1CH, BNC		
	VGA OUTPUT	STANDARD VGA*1: 1280 x 1024		
AUDIO	INPUT	4CH, RCA		1CH, RCA
	OUTPUT	1CH, RCA		
	TALK BACK	YES		
CONTROL	MOUSE	2*USB2.0		
	IR CONTROLLER	YES		
STORAGE	BUILD IN INTERFACE	SATA 2.6 *2(2*HDD 2TB), Support RAID0 & 1		
DISPLAY	DIVISION	1,4	1, 4, 8, 9	1, 4, 8, 9, 16
	ZOOM	Preview and Playback Zoom Support		
RECORDING	COMPRESSION	H.264 MAIN PROFILE		
	RECORDING MODE	Manual/Schedule/Motion Detection/Sensor		
	RESOLUTION	NTSC	NTSC: 704*480, 704*240, 352*240	
		PAL	PAL: 704*576, 704*288, 352*288	
	RECORD FRAME RATE	NTSC	NTSC: 120FPS@D1	NTSC: 480FPS@CIF
		PAL	PAL: 100FPS@D1	PAL: 400FPS@CIF
	QUALITY	Worst, Worse, General, Good, Better, Best		
	MOTION DETECTION	Sensitivity: Multi Level, 8*8Grid		
PLAYBACK	WATER MARK	YES		
	PLAYBACK FRAME RATE(PAL)	120(100)FPS	240(200)FPS	480(400)FPS
	MULTI CHANNEL PLAYBACK	1/4	1/4/8	1/4/9/16
	SPEED	Normal, SLOW&FF(1/4, 1/3, 1/2, 1*, 2*, 3*, 4*)		
	SEARCH METHOD	Time, Event, Channels and Calendar		
COMMUNICATION	REMOTE SOFTWARE	Remote Client, IE Brower, Mobile, CMS, Firefox, Google Chrome, Mac Safari		
	REMOTE OPERATION	Remote view, remote playback, remote setup		
	NETWORK SERVICE	TCP/IP, UDP, HTTP, DDNS, SMTP(SSL), LAN, DHCP, PPPOE		
	GUI INTERFACE	Supported GUI 16 Bit True Color		
	PTZ PROTOCOL	1*RS485, Support 18 Kinds of Protocol		
BACKUP	EXTERNAL	2*USB2.0, Removable DVD-RW, USB Disk up to 32G		
	NETWORK	YES		
	FILE	H.264 Compression / AVI		
GENERAL	ALARM IN/OUT	4 CH / 1CH		1CH / 1CH
	RS-485	1		
	UNIT DIMENSION(mm)	W340xD268xH64mm		
	OPERATION TEMPTERATURE	10°~40°		
	WORKING HUMIDITY	10% ~ 90%		
	POWER CONSUMPTION	DC 12V, 4A, 10~15W (Exclude HDD)		