

Multifunctional Keyboard Controller




FEATURE

- Password protection, support multiple user authority
- 3-Axis joystick for PTZ control
- High Resolution LCD, operate pattern tour
- Cruising track and presets by OSD menu
- Control speed dome, PTZ camera, Matrix switcher and DVR
- Support character input, buttons with backlight
- Ethernet, RS-485 and RS-232 port



Keyboard Controller

DIMENSIONS (mm)

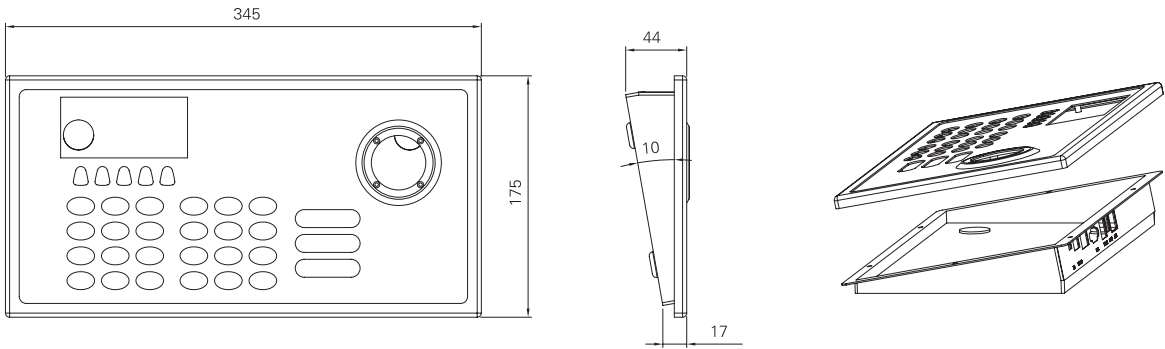

SPECIFICATIONS

Protocol	Pelco-P, Pelco-D
Baud Rate	2400 bps, 4800 bps, 9600 bps, 19200 bps
Communication Interface	RS485, RS232, RJ45, USB
Transmission Distance	1200 m
Maximum Cable length	1200 m
Working Temperature	-10°C~50°C
Working Humidity	10%~90%
Size	345mm*175mm*98mm
Power Supply	DC12V