



HI-5110V


3.7-12mm IR

IR VANDAL DOME CAMERA



FEATURES

- Removable IR cut filter (ICR), (optional)
- Weather-proof : IP66
- IR distance : 12M
- Up to 540 TVL
- Day / Night function
- Unbreakable housing
- Burglar-proof screw
- LED Built-in

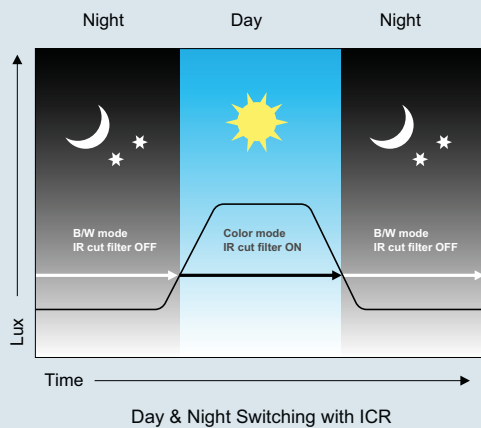

SPECIFICATIONS

ITEM	HI-5110V
Pick-up Device	1/3" CCD image sensor
Picture Elements (H*V)	NTSC: 510 x 492 PAL: 500 x 582 (Med-res.) NTSC: 768 x 494 PAL: 752 x 582 (Hi-res.)
H. Sync Frequency	NTSC:15.734 KHz, PAL:15.625 KHz
V. Sync. Frequency	NTSC:59.94 Hz, PAL:50 Hz
Synchronization	Internal/DC Type
Horizontal Resolution	540 TVL
Back Light Compensation	ON/OFF Switchable
Electronic Shutter	ON/OFF Switchable, Range:1/50(1/60) ~ 1/100,000 sec.
Gain Control	AUTO
Lens	3.7~12mm Auto IRIS Vari-Focal Day&Night Lens
LED	12 Unit 850nm Infraed LED, 10,000hrs
IR Distance	12M
Gamma Correction	0.45
S/N Ratio	More than 48 dB (AGC off)
Video Output	1 Vp-p, 75 Ohms
Power Supply	DC 12V
Power Consumption	300mA
Storage Temperature	-30° ~ +60°
Operating Temperature	-10° ~ +45°
Dimension (φ *H)	137x 97 mm
Weight	700 g

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE