


QH-D5508A/QH-D5516A/QH-D5532A

Standalone DVR




Key Features

- 8/16/32 Channel D1 Standalone DVR
- Linux Operation system, H.264 Compression/AVI
- Record Frame Rate Support D1/HD1/CIF
- 2 CH BNC; HD VGA Output; HDMI 1080P Output optional
- Remote Client, IE Browser, Mobile, CMS, Firefox, Google Chrome, Mac Safari
- Talk Back, Loop Out, RS485, VGA, SATA 2.6*8(8*HDD 2TB)
- 2*USB2.0, USB Disk up to 32G, DVD±RW, SD Card up to 32GB
- 3G Device Win Mobile 5.0/6.0, Symbian, Android, Blackberry, Iphone (recommended)

Dimensions

Unit : mm

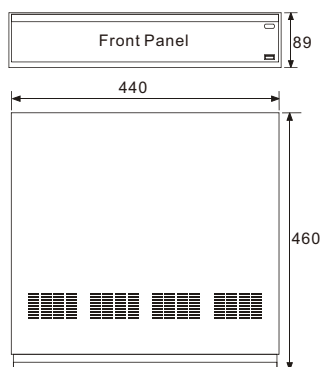

Technical Specifications

Model Name			QH-D5508A	QH-D5516A	QH-D5532A
OPERATION SYSTEM			LINUX		
VIDEO	VIDEO SYSYEM		NTSC/PAL Switch Selectable		
	INPUT		BNC*8,1.0Vp-p, 75ohm	BNC*16,1.0Vp-p, 75ohm	BNC*32,1.0Vp-p, 75ohm
	CVBS		2 CH BNC(1.0Vp-p,75Ω); HD VGA Output; HDMI 1080P Output optional		
	SPOT		1CH, BNC		
	LOOP OUT		8CH optional	16CH optional	32CH optional
	VGA OUTPUT		HD VGA*1: 1280 x 1024		
AUDIO	INPUT		8CH , RCA	16CH , RCA	
	OUTPUT		1CH, RCA	2CH, RCA	1CH, RCA
	TALK BACK		YES		
CONTROL	MOUSE		2*USB2.0		
	IR CONTROLLER		YES		
STORAGE	BUILD IN INTERFACE		SATA 2.6 *8 (8*HDD 2TB)SD Slot up to 32GB Card		
DISPLAY	DIVISION		1, 4, 8, 9	1, 4, 8, 9, 16	1, 4, 9, 16, 25, 36
	ZOOM		Preview and Playback Zoom Support		
RECORDING	COMPRESSION		H.264 MAIN PROFILE		
	RECORDING MODE		Manual/Schedule/Motion Detection/Sensor		
	RESOLUTION	NTSC	NTSC:704*480,704*240,352*240		
		PAL	PAL:704*576,704*288,352*288		
	RECORD FRAME RATE	NTSC	240(D1) FPS	480(D1) FPS	960(Half D1)FPS
		PAL	200(D1) FPS	400(D1)FPS	800(Half D1)FPS
	QUALITY		Worst, Worse, General, Good, Better, Best		
	MOTION DETECTION		Sensitivity: Multi Level,8*8Grid		
	WATER MARK		YES		
PLAYBACK	PLAYBACK FRAME RATE(PAL)		200(D1) FPS		
	MULTI CHANNEL PLAYBACK		1/4/8	1/4/8/9/16	
	SPEED		Normal,REW&FF(1/16,1/8,1/4,1/2,2*,4*,8*16)		
	SEARCH METHOD		Time, Even, Channels and Calendar		
COMMUNICATION	REMOTE SOFTWARE		Remote Client, IE Brower, Mobile, CMS, Firefox, Google Chrome, Safari		
	REMOTE OPERATION		Remote view, remote playback, remote setup		
	NETWORK SERVICE		TCP/IP, UDP, HTTP, DDNS, SMTP(SSL), LAN, DHCP, PPPOE		
	3G DEVICE		Win Mobile5.0,6.0, Symbian, Android, Blackberry, Iphone(recommended)		
	GUI INTERFACE		Supported GUI 16 Bit True Color		
	PTZ PROTOCOL		1*RS485, Support 18 Kinds of Protocol		
BACKUP	INTERNAL		DVD±RW, SD Card up to 32GB		
	EXTERNAL		2*USB2.0		
	NETWORK		YES		
	FILE		H.264 Compression / AVI		
GENERAL	ALARM IN/OUT		8CH Input 4 CH Output	16CH Input 4 CH Output	
	RS-485		1		
	UNIT DIMENSION(mm)		440(W) * 460(D) * 89(H)		
	OPERATION TEMPERATURE		10°~40°		
	WORKING HUMIDITY		10% ~ 90%		
	POWER CONSUMPTION		DC 12V,6A,10~15W (Exclude HDD)		