

QH-1135

-30°C Low-Temperature Waterproof Camera




Key Features

- 1/3"Sony Color CCD with 700/600TVL
- 30EA LED with 40-50M IR Distance
- Built-in 4-9mm(9-22mm optional)lens optional
- Colored(0.5Lux),black and white(0.01Lux LED on)
- IP66-rated waterproof standard,Low Temp. with -30°C
- Voltage with DC12V or AC24V
- OSD Operation menu optional

Dimensions

Unit : mm

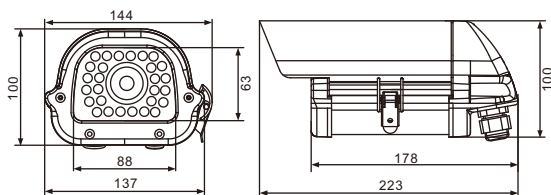

Technical Specifications

Model NO.	QH-1135SNH-4		QH-1135SNH-3NVP
VIDEO			
Imaging Device	1/3" Sony Effio-E 960H Exview CCD		1/3" Sony Color CCD
TV System	PAL/NTSC		
Total Pixels	PAL:1020(H)*596(V); NTSC:1020(H)*508(V)		PAL:795(H)*596(V); NTSC:811(H)*508(V)
Effective Pixels	PAL:976(H)*582(V); NTSC:976(H)*494(V)		PAL:752(H)*582(V); NTSC:768(H)*494(V)
Scanning System	2:1 Interlace		
Synchronization	Internal		
Horizontal Resolution	700TVL		600TVL
Min. Illumination	0Lux/F1.2(LED ON)		
S/N Ratio	>48dB		
Video Output	1Vp-p,75ohm, BNC		
LENS			
Focal Length	4-9mm / 9-22mm manual VF lens optional		
OPERATIONAL			
On Screen Display	Support		
Shutter	Auto		
AGC	Auto		N/A
D-WDR	N/A		D-WDR 0-63 Selectable
Backlight Compensation	ON/OFF		
DNR	2D-DNR		
Motion Detection	Yes		ON/OFF
ATR/H.L.C./AFD	Yes		H.L.C. 0-255
White Balance	ATW		ATW1/ATW2/Auto
Privacy Mask	8 Masks		
Contrast	N/A		0.3-1.0 optional
DPC	N/A		Support
Park Line	N/A		Support
Lens Shad	N/A		0-255 optional
Delay CNT	0-10		N/A
Mirror	ON/OFF		
Sharpness	1-128		0-255 Selectable
Infrared LED	30EA		
IR Distance	40-50 Meters		
Infrared Spectrum	850nm		
ENVIRONMENTAL			
Operation Temperature	-10°C ~ +50°C;With Heater:-30°C ~ +50°C		
Storage Temperature	-20°C~60°C		
Protection	Outdoor IP66 (Waterproof)		
ELECTRICAL			
Input Voltage/Current	DC12V 540mA		
Adapter Requirement	DC12V2A		
Color	Beige		
Dimensions	144*223*100mm		
Net Weight	1.67kg		